B2031P

Technical Specifications


Version 1.0 August 2003



H B C H



High-Resolution, Ultra-Linear Reference Studio Monitor

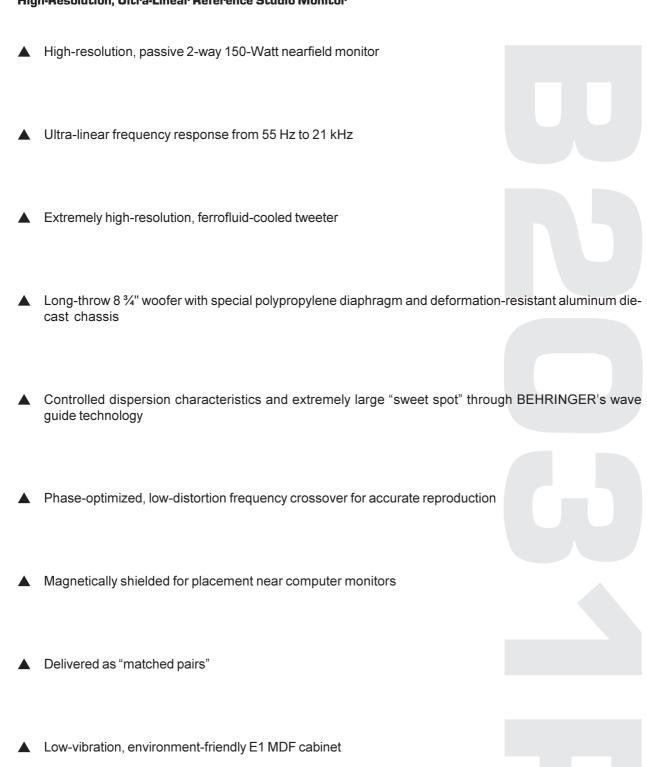

▲ Designed in Germany. Manufactured under ISO9000 certified management system

TRUTH B2031P

SPECIFICATIONS

CONNECTOR

Type binding posts

SYSTEM SPECIFICATIONS

Frequency response 55 Hz to 21 kHz Sound pressure level 89 dB (1 W/1 m)

COMPONENTS

Tweeter 1" dome, ferrofluid-cooled Woofer 8 3/4", polypropylene diaphragm

CROSSOVER

Crossover frequency 2 kHz

DIMENSIONS/WEIGHT

Dimensions (H x W x D) 15 4/5" (401 mm) x 10 1/10" (257 mm) x 10 1/2" (267 mm)

Weight 11.5 kg (25 1/3 lbs)

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

The information contained in this manual is subject to change without notice. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER is a registered trademark.

ALL RIGHTS RESERVED.

© 2003 BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER Spezielle Studiotechnik GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchheide II, Germany Tel. +49 2154 9206 0, Fax +49 2154 9206 4903